

5

4

3

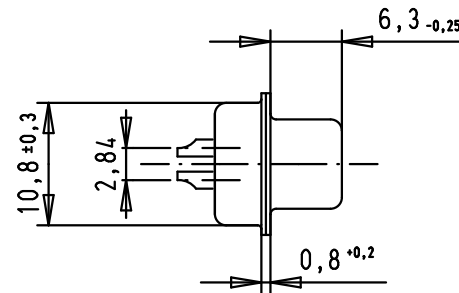
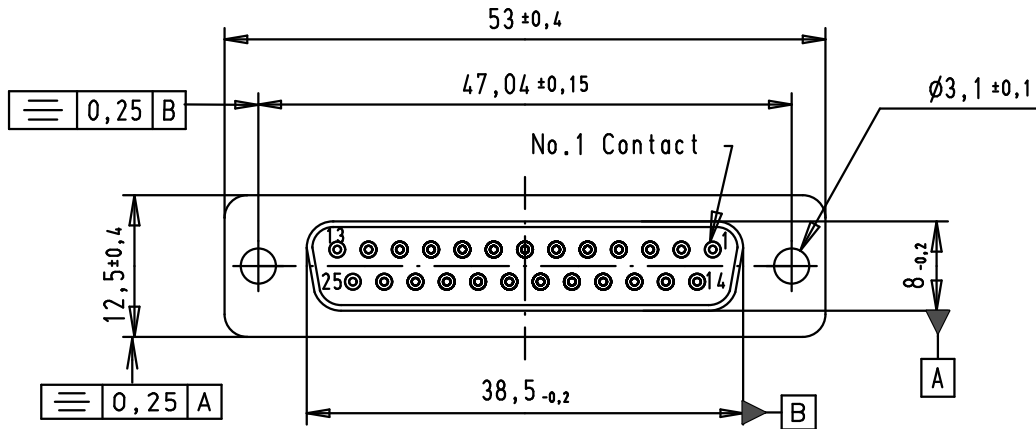
2

1

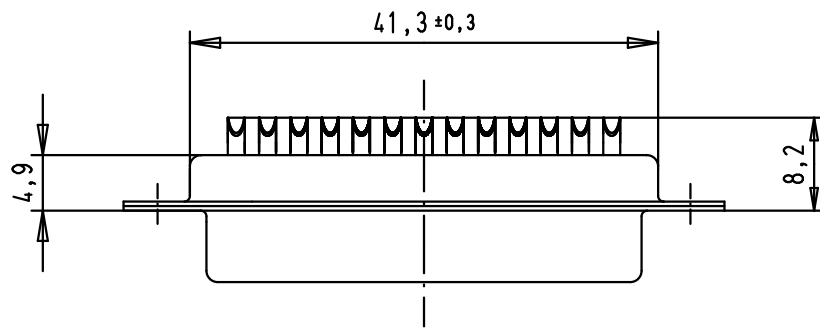
SPECIFICATION



Performance level	PL2
Filter type	C
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB



Solder buckets for AWG 20 Max



						 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, straight, 25 Poles, solder buckets, with holes	Maßstab/ Scale 1.5:1
			Detail.	8-JUL-02	CV			
			Insp.	12/01/12	JB		TB 09643117240	Blatt/ Page 1 / 1
36283	12/01/12	SD	Stand.					
33271	28/11/05	JMDR	HARTING EURL F-95972 Paris					
31058	8-JUL-02	CV	Mod.	Sub.				

D

C

B

A