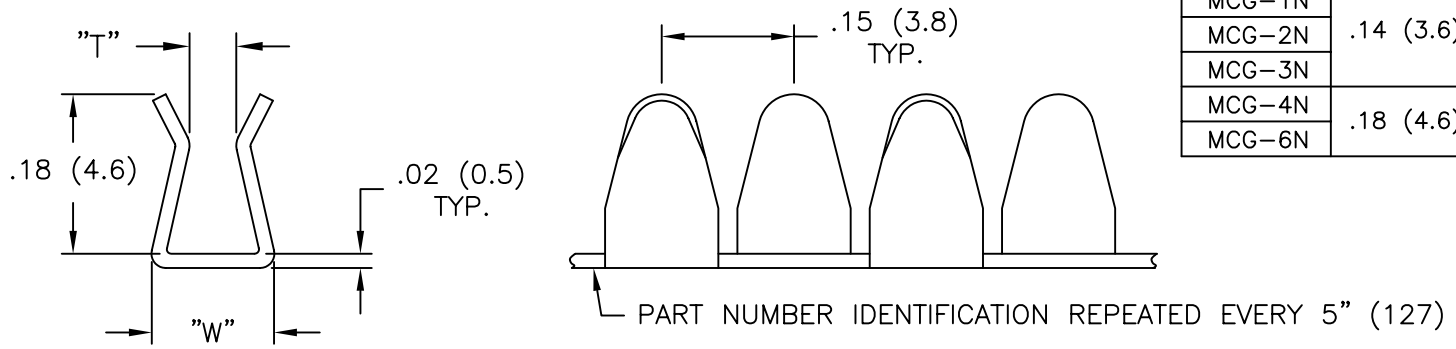

PART NO.	DIM "W"	"T" APPLICATION THICKNESS
MCG–1N	.14 (3.6)	.029–.045 (0.7–1.1)
MCG–2N		.044–.056 (1.1–1.4)
MCG–3N		.055–.069 (1.4–1.7)
MCG–4N	.18 (4.6)	.069–.090 (1.7–2.3)
MCG–6N		.113–.130 (2.9–3.3)

NOTES:
1. MATERIAL: 304 STAINLESS STEEL (RMS–283).
2. COATING: NYLON 11 (RMS–192), COLOR: BLACK.
   TABER ABRASION RESISTANCE: PER NFT 30–015,
   5 TO 8 mg LOSS AFTER 100 CYCLES.
4. DIELECTRIC STRENGTH: 1000 VOLTS @ 60 HZ.
5. OPERATING TEMPERATURE RANGE: –40°F TO 285°F (–40°C TO 140°C).
6. SALT SPRAY TESTING: 2000 HOURS, ASTM B117. MIL–STD–202, METHOD 301.
7. FLAMMABILITY: UL 94 V–0 YELLOW CARD NO. E113553 NZMT2.
8. RANDOM SHOCK AND VIBRATION: MIL–STD–1344, METHOD 2005.1, TEST CONDITION VI, LETTER "J".
   DURATION 8 HOURS LONGITUDINAL AND 8 HOURS PERPENDICULAR. rms G 41.7.
9. HAND HELD CUTTING TOOL NEEDED, ORDER P/N : MCGS–1
10. FITS ANY TWO AXIS CONTOUR.
11. COLOR CODE STRIPE: PRINTING INK (RMS–346).
12. PACKAGING: 100 FT (30.5m) REEL.
    25 FT (7.6m) WITH SHEARS, AVAILABLE BY SPECIAL ORDER ONLY.
    TO ORDER, ADD SUFIX "–PK" TO PART NO.

REV	DESCRIPTION	ENGR DATE
D	SEE ECN #1284 FOR CHANGES	SK 02.08.07
C	SEE ECN #1283 FOR CHANGES	SK 02.05.07
B	SEE ECN #529 FOR CHANGES	SM 11.20.02
A	SEE ECN #517 FOR CHANGES	SM 11.12.02

TITLE: METAL CONTINUOUS GROMMET

DWG IN IN (MM)

TOLERANCES UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC=±1/64
ANG=±1°

FILE # MCG–XN | DWN: E.P. | APP:
MAT'L: SEE NOTES | DT: 11–9–98 | DT:
RE: RICHCO, INC.

RICHCO INC.
PO BOX 804238,CHICAGO,60680
(773) 539–4060

FINAL

PART # SEE TABLE

PRINT TYPE CA